


SECTION A - A
NOT TO SCALE

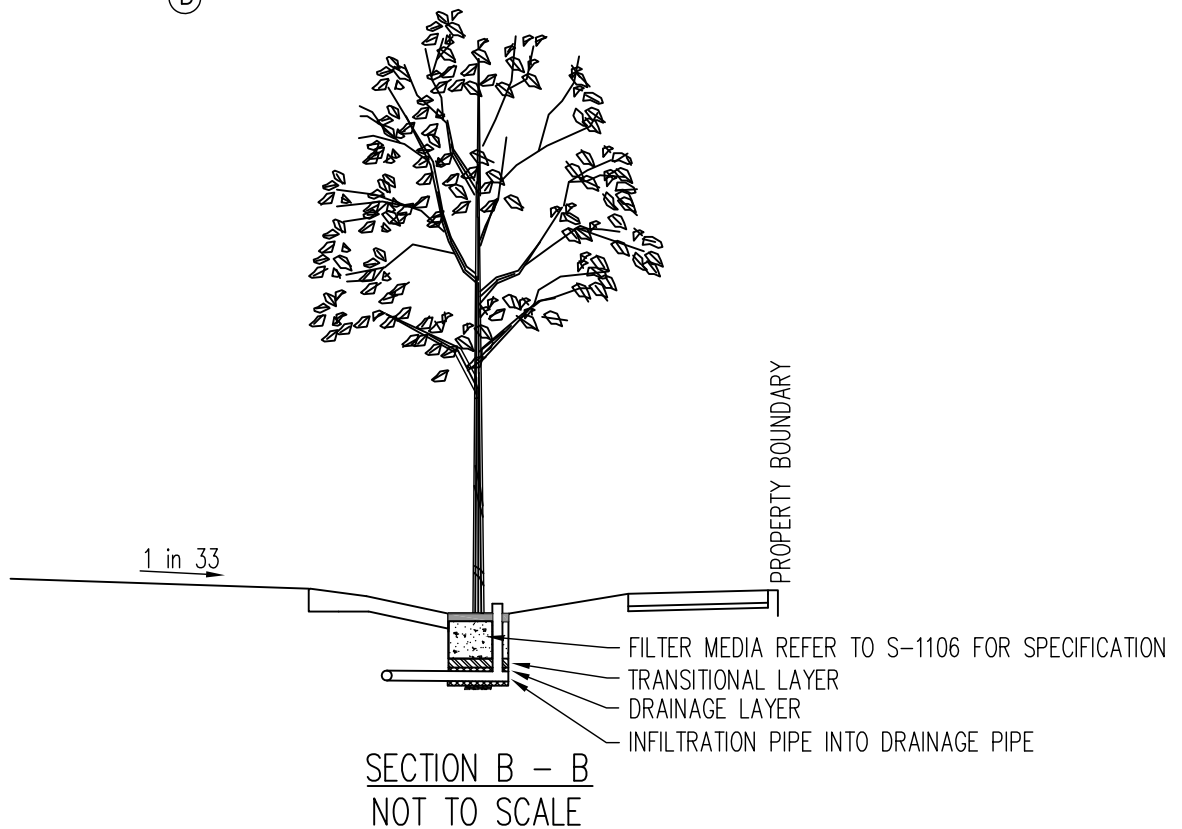

SECTION B - B
NOT TO SCALE

NOTES:

1. MODIFIED KERB TO BE 150mm THICK CONCRETE F'C=25Mpa, SLUMP = 80mm MAX.
ALL CONCRETE TO BE CONSTRUCTED ON 50mm COMPACTED DEPTH OF 20mm CLASS 3 FCR
2. REFER TO CODE OF PRACTICE FOR COORDINATION OF STREET WORKS, VICTORIA FOR SERVICE LOCATION.
3. REFER TO CASEY STANDARD DRAWING S-1106 FOR FILTER SPECIFICATION.

CITY OF CASEY

BIORETENTION TREE PLANTER SYSTEM
FOR USE IN LOCAL STREETS

MANAGER OF ENGINEERING &
ENVIRONMENTAL SERVICES
LAST UPDATE 09.11.2012

AMENDMENTS:

S-1108